

Filter Tap Coupler



Features

High Return Loss

Low PDL

Low Cost

Applications

Telecommunications

Optical Amplifier

Fiber Lasers

Testing Systems



Specifications

Parameters	Unit	Values
Center Wavelength	nm	1064
Operating Wavelength Range	nm	± 40
Type		1x2 2x2
Max. Excess Loss	dB	0.8 1.1
Max. Uniformity (only for 50/50)	dB	0.6 0.7
Tap Ratio (Port 2/4)	%	5 $\pm$ 1.0%, 50% or Specify
Min. Return Loss	dB	50
Max. PDL	dB	0.1
Max. Optical Power (CW)	mW	500
Max. Tensile Load	N	5
Fiber Type		Hi 1060 fiber
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

* Above specifications are for devices without the connectors.

* For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.

Package Dimensions

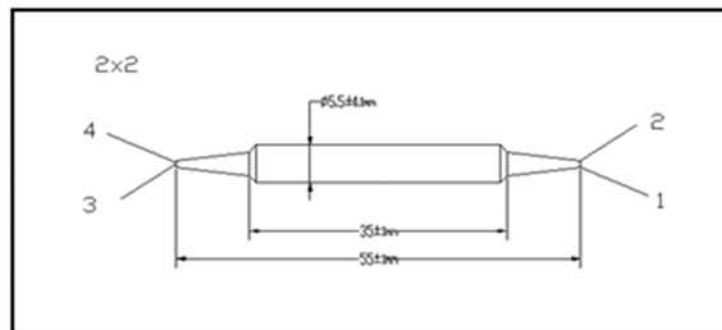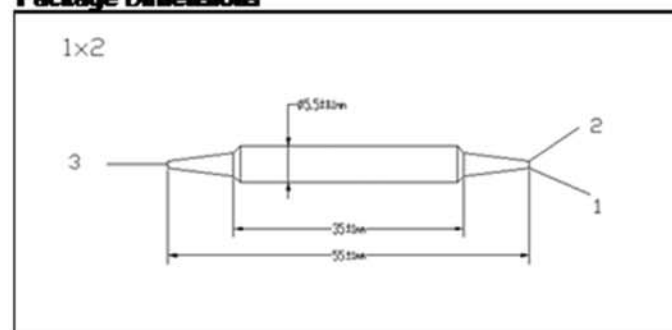

Ordering Information

SMFCH-①①-②-③③-④④④④-⑤⑤⑤⑤-⑥

①①: Wavelength

06 - 1064nm

SS - Specify

②: Port

1 - 1x2

2 - 2x2

③③: Coupling Ratio

05 - 5/95

50 - 50/50

SS - Specify

④④④④: Connector Type on Port 1, 2, 3 & 4

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

⑤: Fiber Length

1 - 1.0m

S - Specify

⑤⑤⑤⑤: Fiber Jacket on Port 1, 2, 3 & 4

B - 250um Fiber

L - 900um Loose Tube

S - Specify